

Bluetooth Stereo Transmitter HS809 user guide

Notice before using

Thank you for purchasing our Bluetooth Stereo Transmitter HS809. First of all, please check to find everything in your package and carefully study the user guide to know the function details. HS809 is developed by the innovative Bluetooth wireless technology, enabling the stereo devices to become “Bluetooth” including HI-FI,MP3 player, iPod, portable stereo and TV.


Packing List

Please check the product you purchased. Refer to the below package list to make sure there is no shortage or defect inside. The complete package includes the following items:

- ◆HS809 Bluetooth Stereo Transmitter ----- 1
- ◆User Guide ----- 1
- ◆Warranty Card ----- 1
- ◆Two in one Charger (travel charger head +USB cable, input:AC100-240V, 50/60Hz, output: DC5.1V,120mA) ----- 1

If you find any shortage, please contact the retailer shop which you purchase this product from.

Product Instruction

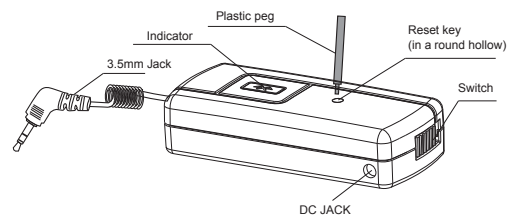

Getting started

To use your HS809 (the Dongle / Transmitter), please follow these simple steps:

- Charge your Dongle
- Pair your Dongle with any Bluetooth Stereo Headset has A2DP profile

Charging

The Dongle comes with a built-in rechargeable battery. Prior to using the Dongle, it is recommendable to charge the battery fully for the first time.

- It takes 1 hour to recharge fully
- In charging : green indicator
- Fully recharged : green indicator will shut off
- Low battery: slow red flash

Power on/off

To power on and power off the Dongle by its switch

Pairing

- 1.Prepare a Stereo headset (e.g. HS889 / HS869)or other Bluetooth device (A2DP profile enabled), must be with same pin code (8888) as HS809. Set it in pairing mode.
2. Power on the Dongle, indicator flashes “ blue ”and “red” alternately.
- 3.The Dongle will search and pair automatically until LED indicator flashes blue only. And the paired headset also shows the successful pairing mode.
- 4.Enjoy your stereo music with the dongle.

Second-pairing

When you like the paired dongle to be paired with next bluetooth headset or device, it is required to reset the dongle by below simple step:

- 1.Power the dongle on.
- 2.Find a small plastic peg enclosed in the package.
- 3.Press “RESET” key (in a round hollow) with plastic peg.
- 4.After reset the dongle, the indicator flashes “ blue ” and “red” alternately in pairing mode to search and pair automatically. Other procedure is same as above “ Pairing ” section.

Specification

Bluetooth Specification: Bluetooth V1.2 compliant, class II

Bluetooth Profile Supported : A2DP

Battery (Li-polymer) : 125mAh

Frequency : 2.4GHz spectrum

Transmitter Range: 10 meter

Audio streaming time : 10 hours

Weight : 14.5g

Size : 47 x 21 x 11(mm)

Storage

- 1.Store the HS809 with power off and safely protected.
- 2.Avoid storage at a high temperatures (above 60°C / 134°F)-such as in a hot vehicle or in direct sunlight. (storage at high temperature can degrade performance and reduce battery life.) Don't expose the Dongle to rain or other liquids.

Indicator Light Chart

- Power off : LED off
- Power on : blue flash
- Low battery : red flash
- In charging : green light
- Pairing mode: blue & red light flash alternately